


Nutsplitter



Integrated Solutions
to Piping Problems



Tool Ref	Bolt Diameter		A mm	B mm	C mm	D mm	E mm	F mm	G mm
	Imp	Metric							
ENS1-1	3/4"	M20	104	228	76	18	104	40.5	9
	7/8"	M22							
	1"	M24							
ENS1-2	3/4"	M20	104	239	90	21	110	40.5	10
	7/8"	M22							
	1"	M24							
ENS2-1	1 1/8"	M27	138	305	102	22	132	57.5	6
	1 1/4"	M30							
	1 1/2"	M33							
ENS2-2	1 1/8"	M30	138	314	114	23	141	57.5	6
	1 1/4"	M33							
	1 1/2"	M36							
ENS3-1	1 3/4"	M45	190	406	132	28	189	80.5	8
	1 7/8"	M48							
	2"	M52							
ENS3-2	1 3/4"	M45	190	416	145	30	199	80.5	8
	1 7/8"	M48							
	2"	M52							
ENS3-3	2 1/4"	M56	190	426	160	31.5	200	80.5	7
	2 1/2"	M60							
	2 3/4"	M64							
ENS3-4	1 3/4"	M45	190	437	174	35	204	80.5	9
	1 7/8"	M48							
	2"	M52							
ENS4-1	2 3/4"	M76	235	474	189	36.5	235	110.5	4
	3"	M80							
	3 1/4"	M85							
ENS4-2	3"	M80	235	495	219	41	240	110.5	3
	3 1/2"	M90							

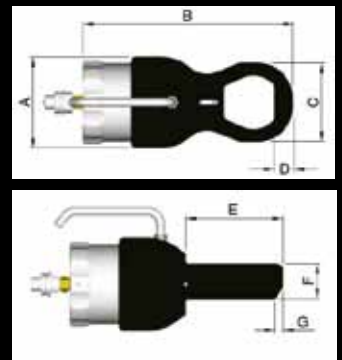

In addition to standard features normally associated with hydraulic nut splitters, our nut splitting system also provides the following benefits:

- Triple edge disposable cutting blade
- Blade positioning scale to eliminate bolt damage
- Cutting depth adjusted by rotating the cylinder
- Size range from 3/4" to 3 1/2" bolt diameters
- Designed to fit BS1560 / ANSI B16.5 flanges
- Special Subsea versions available
- Versatile, reliable and trouble free operation