

T30

Tapping Maching

- **Hardened and ground guide rods to maintain robust, accurate operation;**
- **Quick key hole mounting High torque multiplication drive.**

A portable, lightweight, heavy duty tapping machine for all general purpose on site tapping and flange stud tapping.


The machine is supplied complete with toolkit including:

- Hose connection
- Motor & couplings
- All required mounting base bolts (M10)
- Storage / shipping box
- CE certificate
- Packing list and manual

Technical Details		
Maximum Tapping (without nose bush)	76mm	3"
Maximum Diameter (through nose bush)	70mm	2.75"
Location Diameter (nose bush)	80mm	3.15"
Clamping Holes 3 off 10.5 thro' - PCD	115mm	4.53"
Standard Stroke	305mm	12"
R.P.M.	Min: 1	Max: 11
Drive - Hydraulic @ 70 bar (1050 p.s.i.)	3.7 Kw	5.0 Hp
Hydraulic Supply Required	40 L/min	10 Gal/min

Weights and Dimensions		
Machine Weight	53 Kgs	117 Lbs
Shipping Weight	67 Kgs	147 Lbs

Shipping Dimensions					
Length		Width		Height	
mm	inches	mm	inches	mm	inches
870	34	370	15	400	16

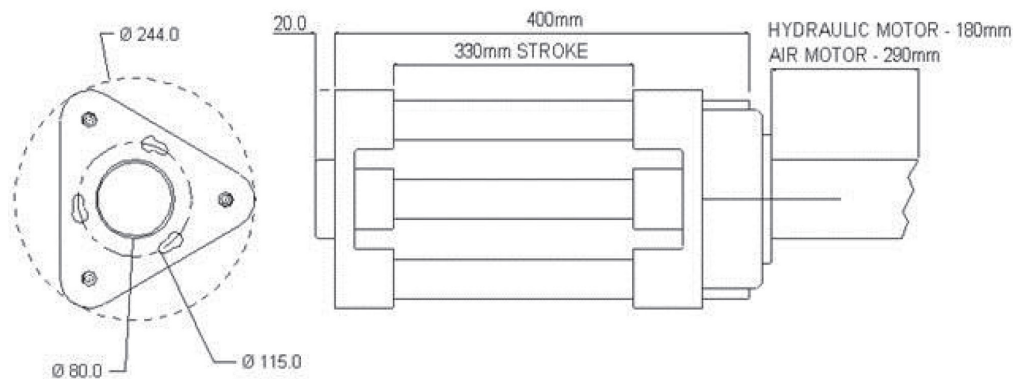

Integrated Solutions to Piping Problems | www.patriot-int.com

The Netherlands

Dordrecht

T: +31 (0) 78 652 4111

E: info@patriot-int.com

United Kingdom

Aberdeen

T: +44 (0) 1224 724726

E: info@patriot-int.com

Germany

Düren

T: +49 (0) 179 346 4600

E: info@patriot-int.com

Denmark

Esbjerg

T: +45 (0) 76 56 99 00

E: info@patriot-int.com

