


Drilling HT20

Technical documentation

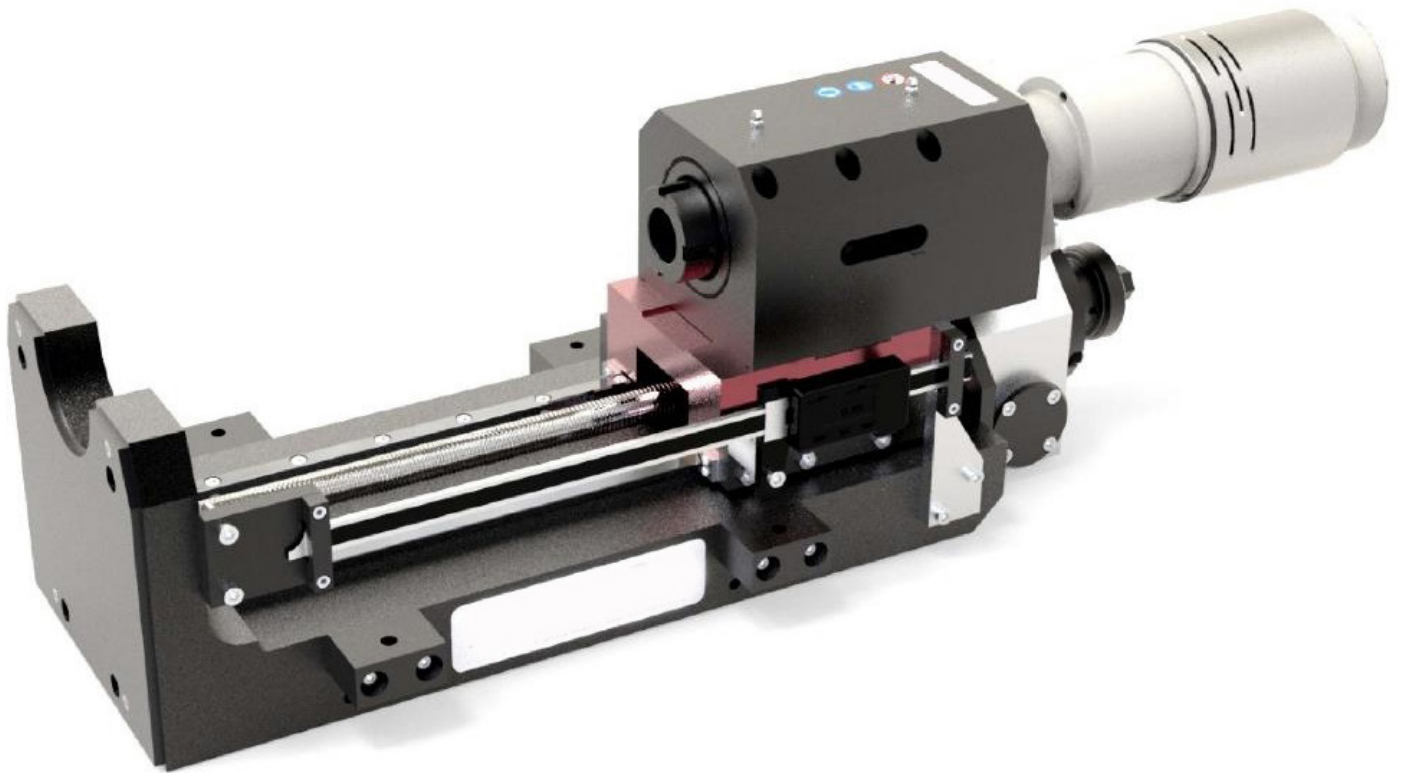

Specifications		
Maximum Hole diameter (through base)	50mm	2"
Standard stroke	276mm	10.9"
Maximum stroke available (optional)	500mm	20"
R.P.M – air 3.5hp or 5.0hp hydraulic	0 - 286	
Drive – Pneumatic @ 6 bar (90 p.s.i)	4.0 Hp	3.0 Kw
Drive – Hydraulic @ 70 bar (1050 p.s.i)	6.0 Hp	4.5 Kw
Feed – Pneumatic @ 6 bar (90 p.s.i)	1.1 Hp	0.8 Kw
Feed – hydraulic @ 70 bar (1050 p.s.i)	2.0 Hp	1.5 Kw
Air consumption required	98 s.c.f.m	2.7 m3/m
Hydraulic supply required	50 L/min	13 gal/min

HT20 Portable Drill (16" stroke - 10" Capacity)

A versatile (1xL) portable drilling and boring machine for general drilling and stud removal applications. The machine can be bolted directly to the work piece.

- Linear Rails & Guides - Accuracy and high load carrying capacity
- The Spindle Type is world wide standard up to 4 MT
- Helical geared spindle drive
- Optional auto feed gearbox and motor

FEED RATES

Variable auto feed (optional) 0 – 32 mm/min 0 - 1.25"/min

Shipping weight 69 Kgs 152 lbs

Machine weight (including 10kg auto feed) 45 kgs 100 lbs

WEIGHTS AND DIMENSIONS

Shipping dimensions L - 86 - (34") W- 44cm (17") H- 37cm (15")

Integrated Solutions to Piping Problems | www.patriot-int.com

The Netherlands

Dordrecht

T: +31 (0) 78 652 41 11

E: info@patriot-int.com

United Kingdom

Aberdeen

T: +44 (0) 1224 724726

E: info@patriot-int.com

Belgium

Antwerp

T: +32 (0) 3 600 17 07

E: info@patriot-int.com

